




# ES220S

## SPLIT-SYSTEM AIR-COOLED 22 HP SINGLE CIRCUIT SEMI-HERMETIC

### DIMENSIONAL DRAWINGS

#### EVAPORATOR SECTION - ES220S

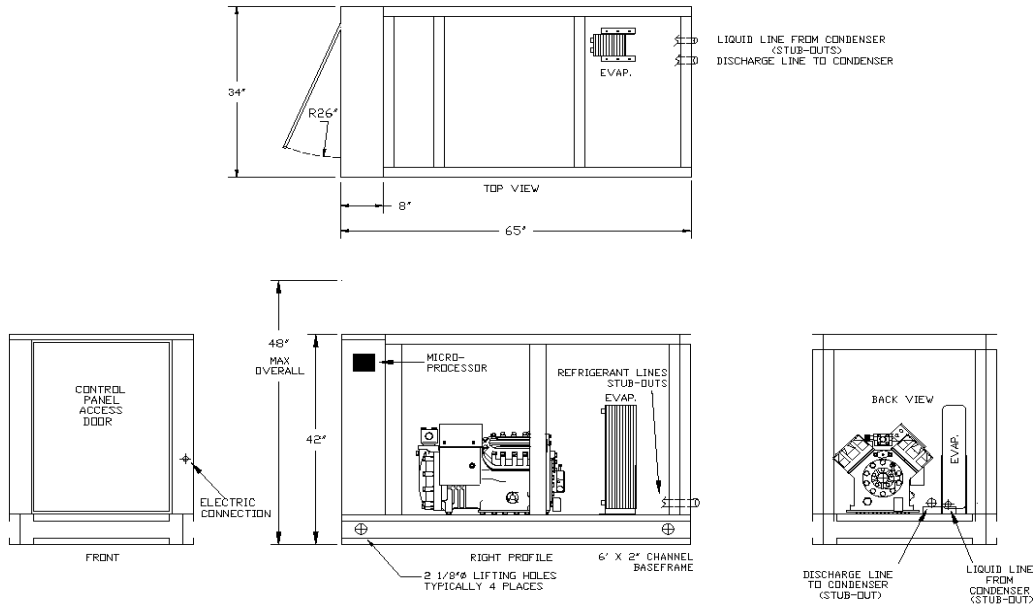

LENGTH	WIDTH	HEIGHT	WEIGHT	FLUID CONNECTIONS	REFRIGERANT CONNECTIONS	
					DISCHG	LIQUID
65"	34"	48" MAX	1000 LBS	2 1/2" M-NPT	1 3/8"	7/8"

### PRODUCT PERFORMANCE INFORMATION

REFRIGERANT	COMPRESSOR OPER. TEMP. SUCTION RANGE	LFT °F	80°F AMB		90°F AMB		95°F AMB		100°F AMB		105°F AMB	
			TONS	EER	TONS	EER	TONS	EER	TONS	EER	TONS	EER
R407C	10°F to 55°F	20	10.2	8.6	9.3	7.6	8.9	7.2	8.5	6.7	8.0	6.3
		35	14.4	10.6	13.3	9.3	12.8	8.8	12.4	8.2	11.8	7.7
		45	17.8	12.1	16.6	10.6	15.9	9.9	15.4	9.3	14.7	8.7
		55	21.6	13.6	20.1	11.8	19.4	11.0	18.6	10.3	17.9	9.6
		65	25.6	15.0	23.8	13.0	23.0	12.1	22.1	11.3	21.3	10.5
R404A	-10°F to 45°F	0	8.5	7.0	7.9	6.3	7.5	5.9	7.2	5.6	6.8	5.3
		10	9.9	7.3	9.1	6.4	8.7	6.1	8.3	5.7	7.8	5.3
		25	13.5	8.7	12.3	7.5	11.7	7.0	11.1	6.5	10.6	6.1
		40	17.9	10.3	16.4	8.9	15.6	8.3	14.8	7.7	14.2	7.2
		55	23.5	12.0	21.6	10.4	20.5	9.6	19.5	8.9	18.6	8.3

**DRAKE REFRIGERATION INC**  
 2900 SAMUEL DRIVE  
 BENSALEM, PA 19020  
 (888) 289-7299  
[www.drakechillers.com](http://www.drakechillers.com)

\*ALL INFORMATION **FOR REFERENCE ONLY**




®

# ES220S

## SPLIT-SYSTEM AIR-COOLED 22 HP SINGLE CIRCUIT SEMI-HERMETIC

### DIMENSIONAL DRAWINGS

#### CONDENSER SECTION - CS220S

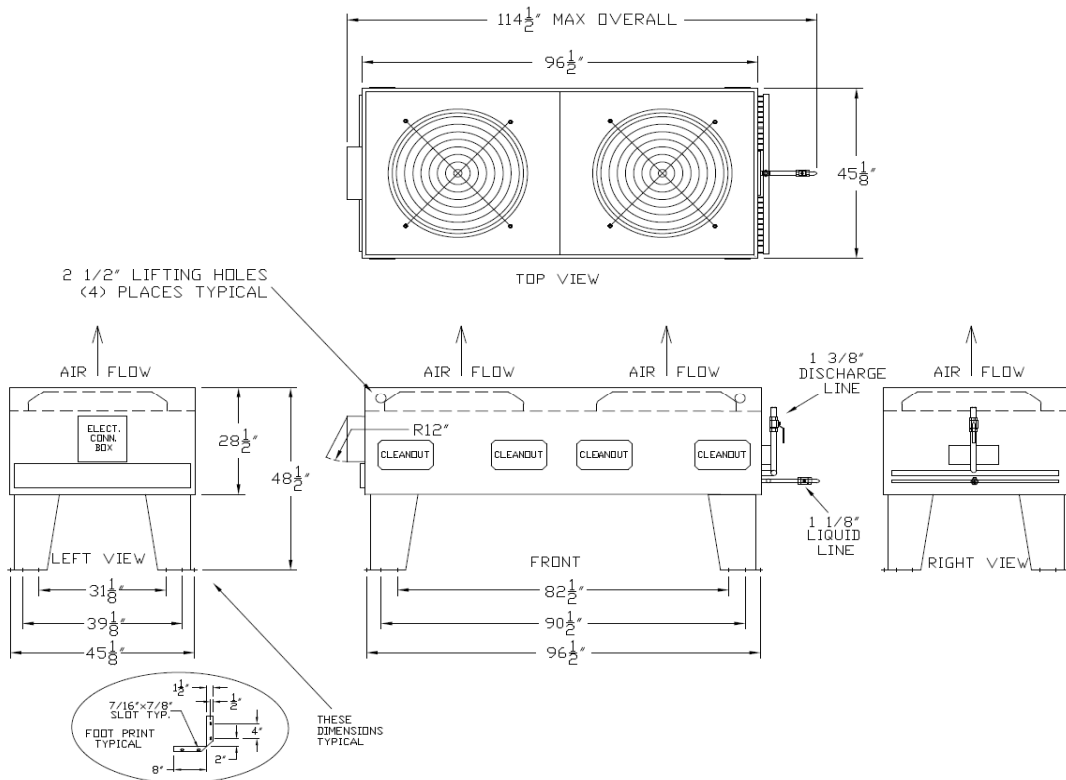

LENGTH	WIDTH	HEIGHT	WEIGHT
96.5" MAX	45.125"	48.5"	680 LBS

**DRAKE REFRIGERATION INC**  
 2900 SAMUEL DRIVE  
 BENSLEM, PA 19020  
 (888) 289-7299  
[www.drakechillers.com](http://www.drakechillers.com)

\*ALL INFORMATION *FOR REFERENCE ONLY*



# ES220S

## SPLIT-SYSTEM AIR-COOLED 22 HP SINGLE CIRCUIT SEMI-HERMETIC

STANDARD FEATURES	
FEATURE	BENEFIT
Listings	ETL 3046941, UL STD 1995, CAN/CSA STD, C22.2 No. 236
Micro Control Systems Controller	Open source, microprocessor built to operate in the HVAC/R industry
Controls	BMS, BAS communications, remote access, monitoring services
Stainless Steel Brazed Plate Evaporator	Corrosion resistant, fully insulated and selected upon requirements
Semi-Hermetic Compressor	Industry leader, rebuildable, long lasting compressor
Compressor Crankcase Heater	Prevents compressor damage caused by cold refrigerant on startup
Suction Accumulator	Protects the compressor from damage caused by liquid flood back by preventing liquid from entering the compressor
Water Flow Switch	Protects against process fluid freezing caused by pump failure
Hot Gas Bypass	Aids in the prevention of evaporator freeze ups and capacity control
Copper Tube/Aluminum Fin Condenser	Rust resistant and high CFM
Painted Galvanized Steel Metal Cabinet	Sturdy, corrosion resistance, professional appearance
Insulated Process Fluid Lines	Maximum thermal efficiency
Factory Tested	Ensures the unit meets the customer's performance designed criteria and arrives in working order
Full Refrigerant Charge	Hassle free and more efficient installation
NEMA 3R Rated Electrical	Indoor/outdoor use
Phase Monitors	Electrical protection for compressors

AVAILABLE OPTIONS	
OPTIONS	AVAILABLE
Extended Warranty	4 year extended compressor warranty
Electrical	Compressor fusing, disconnects, circuit breakers and more
Stainless Steel Pumps	1/3 HP to 25 HP on board pumps in multiple configurations & options
Fluid Piping Upgrades	Flow meters, pressure gauges, low flow bypass valves, and more
Coastal Protection/Hazardous Environments	Heresite coating, "Gold" and Copper condenser coils
Low Ambient Protection	EC fan for temperature down to +10°F, Head pressure control for temperatures down to -20°F, Heated receivers for temperature down to -40°F
Other	Casters, service outlets, city water add-ons, heaters, etc.

*More options and customization available, contact factory for information: (888) 289 - 7299*

AVAILABLE MODEL NUMBER VOLTAGE REFERENCE	
T3 (208-230/3/60)	--- T4 (460/3/60) --- T5 (575/3/60)

PRODUCT INFORMATION											
MODELS AVAILABLE		COMPRESSOR			FAN MOTOR		RLA EA	LRA EA	MCA	MOP	RECIRC. TANK
R407C	R404A	MODEL	QTY	HP	QTY	FLA EA					
ES220S3-T3-S		4DB3R20M	1	22	2	2.3	65.6	374	90	150	N/A
ES220S3-T4-S						1.2	32.8	187	45	70	
ES220S3-T5-S						0.9	26.5	135	35	60	
ES220S6-T3-S		4DB3R20M	1	22	2	2.3	65.6	374	90	150	N/A
ES220S6-T4-S						1.2	32.8	187	45	75	
ES220S6-T5-S						0.9	26.5	135	35	60	

**DRAKE REFRIGERATION INC**  
 2900 SAMUEL DRIVE  
 BENSLEM, PA 19020  
 (888) 289-7299  
[www.drakechillers.com](http://www.drakechillers.com)

\*ALL INFORMATION **FOR REFERENCE ONLY**