



# ES240D

## SPLIT SYSTEM AIR-COOLED 24 HP DUAL CIRCUIT SEMI-HERMETIC

### DIMENSIONAL DRAWINGS

**EVAPORATOR SECTION - ES240D**

The drawings show the following dimensions and features:

- Top View:** Overall length is 85", width is 34". A corner radius of R26" is indicated.
- Right Profile:** Overall height is 77" MAX. The evaporator height is 42". It shows a micro-processor, two compressors, and a 6" x 2" channel baseframe with 2 1/8" lifting holes (typically 4 places).
- Front View:** Shows the control panel access door (CCDP) and electric connection.
- Back View:** Shows the evaporator and discharge lines.
- Fluid Connections:** Labeled as LIQUID LINES and DISCHARGE LINES.

LENGTH	WIDTH	HEIGHT	WEIGHT	FLUID CONNECTIONS	R407C CONNECTIONS		R404A CONNECTIONS	
					DISCHG	LIQUID	DISCHG	LIQUID
85"	34"	60" MAX	1300 LBS	2 1/2" M-NPT	1 1/8"	5/8"	1 1/8"	5/8"

### PRODUCT PERFORMANCE INFORMATION

REFRIGERANT	COMPRESSOR OPER. TEMP. SUCTION RANGE	LFT °F	80°F AMB		90°F AMB		95°F AMB		100°F AMB		105°F AMB	
			TONS	EER	TONS	EER	TONS	EER	TONS	EER	TONS	EER
R407C	10°F to 55°F	20	14.7	7.6	13.5	6.7	12.9	6.2	12.2	5.9	11.6	5.5
		35	20.2	9.2	18.8	8.1	18.1	7.6	17.3	7.1	16.6	6.7
		45	24.4	10.4	22.7	9.1	21.9	8.5	20.9	7.9	20.1	7.4
		55	28.7	11.6	26.8	10.0	25.8	9.4	24.8	8.7	23.8	8.1
		65	33.3	12.8	30.9	11.0	29.8	10.2	28.7	9.5	27.5	8.8
R404A	-10°F to 45°F	0	10.9	5.7	9.9	5.1	9.4	4.7	8.8	4.4	8.4	4.1
		10	13.8	6.6	12.5	5.8	11.9	5.4	11.4	5.1	10.8	4.8
		25	19.1	8.1	17.4	7.0	16.7	6.6	15.6	6.2	15.0	5.7
		40	24.9	9.4	22.8	8.2	21.6	7.6	20.6	7.1	19.7	6.6
		55	31.0	10.6	28.3	9.1	27.0	8.5	25.6	7.8	24.3	7.3

**DRAKE REFRIGERATION INC**  
 2900 SAMUEL DRIVE  
 BENSLEM, PA 19020  
 (888) 289-7299  
[www.drakechillers.com](http://www.drakechillers.com)


\*ALL INFORMATION *FOR REFERENCE ONLY*



# ES240D

## SPLIT SYSTEM AIR-COOLED 24 HP DUAL CIRCUIT SEMI-HERMETIC

### DIMENSIONAL DRAWINGS CONDENSER SECTION - CS240D

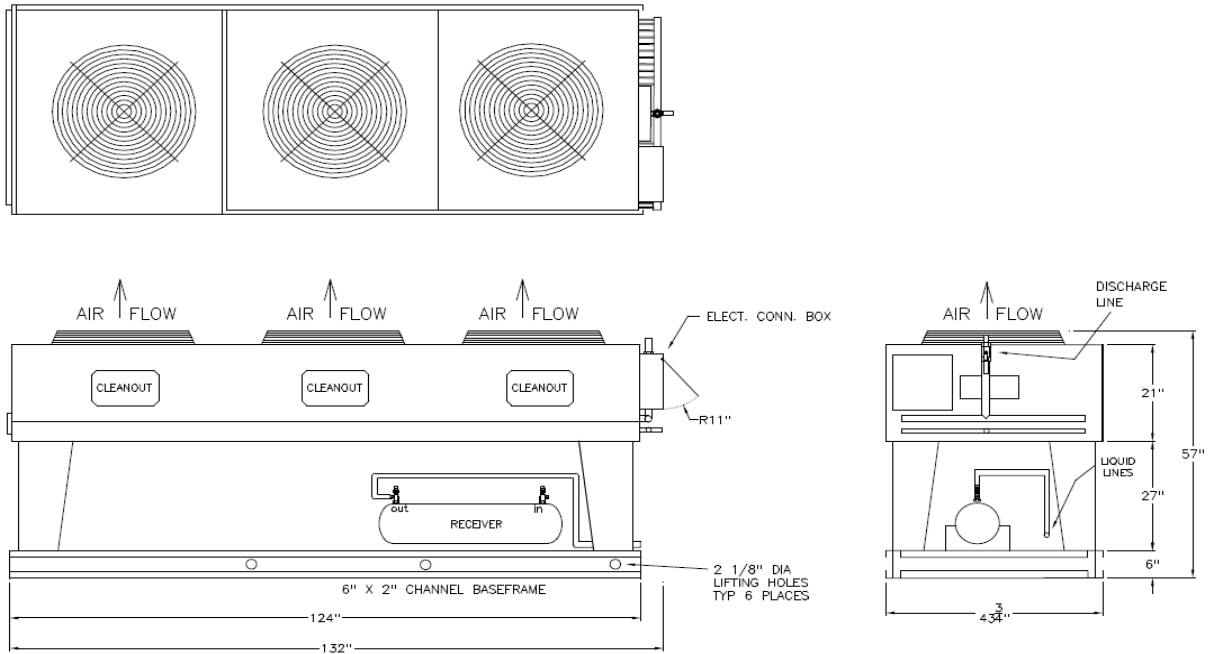

LENGTH	WIDTH	HEIGHT	WEIGHT
132"	43.75"	57"	1150 LBS

**DRAKE REFRIGERATION INC**  
 2900 SAMUEL DRIVE  
 BENSLEM, PA 19020  
 (888) 289-7299  
[www.drakechillers.com](http://www.drakechillers.com)

\*ALL INFORMATION *FOR REFERENCE ONLY*



# ES240D

## SPLIT SYSTEM AIR-COOLED 24 HP DUAL CIRCUIT SEMI-HERMETIC

### STANDARD FEATURES

FEATURE	BENEFIT
Listings	ETL 3046941, UL STD 1995, CAN/CSA STD, C22.2 No. 236
Micro Control Systems Controller	Open source, microprocessor built to operate in the HVAC/R industry
Controls	BMS, BAS communications, remote access, monitoring services
Stainless Steel Brazed Plate Evaporator	Corrosion resistant, fully insulated and selected upon requirements
Semi-Hermetic Compressor	Industry leader, rebuildable, long lasting compressor
Compressor Crankcase Heater	Prevents compressor damage caused by cold refrigerant on startup
Suction Accumulator	Protects the compressor from damage caused by liquid flood back by preventing liquid from entering the compressor
Water Flow Switch	Protects against process fluid freezing caused by pump failure
Hot Gas Bypass	Aids in the prevention of evaporator freeze ups and capacity control
Copper Tube/Aluminum Fin Condenser	Rust resistant and high CFM
Painted Galvanized Steel Metal Cabinet	Sturdy, corrosion resistance, professional appearance
Insulated Process Fluid Lines	Maximum thermal efficiency
Factory Tested	Ensures the unit meets the customer's performance designed criteria and arrives in working order
Full Refrigerant Charge	Hassle free and more efficient installation
NEMA 3R Rated Electrical	Indoor/outdoor use
Phase Monitors	Electrical protection for compressors

### AVAILABLE OPTIONS

OPTIONS	AVAILABLE
Extended Warranty	4 year extended compressor warranty
Electrical	Compressor fusing, disconnects, circuit breakers and more
Stainless Steel Pumps	1/3 HP to 25 HP on board pumps in multiple configurations & options
Fluid Piping Upgrades	Flow meters, pressure gauges, low flow bypass valves, and more
Coastal Protection/Hazardous Environments	Heresite coating, "Gold" and Copper condenser coils
Low Ambient Protection	EC fan for temperature down to +10°F, Head pressure control for temperatures down to -20°F, Heated receivers for temperature down to -40°F
Other	Casters, service outlets, city water add-ons, heaters, etc.

**More options and customization available, contact factory for information: (888) 289 - 7299**

### AVAILABLE MODEL NUMBER VOLTAGE REFERENCE

T3 (208-230/3/60) --- T4 (460/3/60)

### PRODUCT INFORMATION

MODELS AVAILABLE		COMPRESSOR			FAN MOTOR		RLA EA	LRA EA	MCA	MOP	RECIRC. TANK
R407C	R404A	MODEL	QTY	HP	QTY	FLA EA					
ES240D3-T3-S		3DF3R15M	2	12 EA	3	2.3	48.1	275	125	150	N/A
ES240D3-T4-S						1.2	23.6	138	60	80	
ES240D6-T3-S		3DF3R15M	2	12 EA	3	2.3	48.1	275	120	160	N/A
ES240D6-T4-S						1.2	23.6	138	60	80	

**DRAKE REFRIGERATION INC**  
 2900 SAMUEL DRIVE  
 BENSALEM, PA 19020  
 (888) 289-7299  
[www.drakechillers.com](http://www.drakechillers.com)

\*ALL INFORMATION **FOR REFERENCE ONLY**